



SPECIFICATION SHEET


CLING SERIES

EZWINDOW-FROST

FEATURES AND ADVANTAGES:

- Frosted PET with Cling, compatible for (eco) solvent, and Latex printing.
- Cling adheres to any smooth, non-porous surface. The adhesive works by using countless micro suction cups.
- Premium PET base, high and low temperature tolerance, excellent for durable indoor and semi-outdoor display.
- Cling can be removed without residue, even after long term application to a surface.
- Applies easily on glass walls and windows, steel, ceramic, metal, smooth finished wood and plastic.


CONSTRUCTION DRAWING:

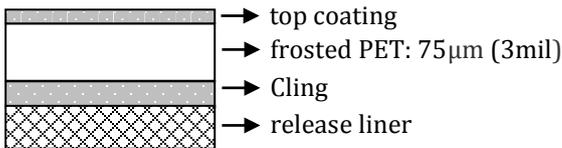

STANDARD SIZE:

100 Feet × 54 inch

PACKAGING:

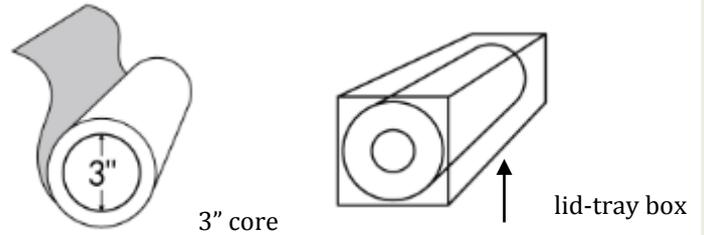

PRINTING INDEX:

- compatible
- Δ testing required
- × not compatible

(ECO) SOLVENT	UV CURABLE	LATEX	DYE/PIGMENT	OFFSET/FLEXO	SCREEN PRINT	TONER BASED
○	Δ	○	×	○	○	Δ

ADHESION DATA:

GB/T 4851-1998 – 180 degree, adhesion to stainless steel

g/cm²
- 72 hour RT 100

PHYSICAL DATA:

Total thickness	150µm(±15) (6mil)
Weight	195g/M2 (±20)
Light transmittance	70~80%
Water resistance	Medium-high
UV resistance	Medium
Relative high temperature	
Operating ranges:	
Long term (days, weeks)	60°C/140°F
Short term (minutes, hours)	120°C/248°F

PROCESS AND STORAGE:

- Working condition: temperature 15°C/59°F to 30°C/86°F, and relative humidity 30% to 60%.
- Application condition: temperature -20°C/-4°F to 60°C/140°F, relative humidity 20% to 80%.
- Storage condition: In original box out of direct sunlight, in temperature 10°C/50°F to 35°C/95°F, relative humidity 20% to 70%
- Shelf life: 12 months under normal storage conditions. Unfinished material should be re-sealed, and used within one month.

NOTICE:

- Excess UV ink piling and should be avoided, hard UV ink may cause brittleness, and cause cutting problems.